

FORM PTO-1136 (REV 5-93)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371			von Kreisler.019
U.S. APPLICATION NO. (If known, use 37 C.F.R. 1.13)			
INTERNATIONAL APPLICATION NO. PCT/EP00/02992	INTERNATIONAL FILING DATE April 4, 2000	PRIORITY DATE CLAIMED July 7, 1999	
TITLE OF INVENTION "METHOD AND DEVICE FOR ENRICHING AIR WITH AN AIR TREATMENT AGENT"			
APPLICANT(S) FOR DO/EO/US Jörg Peter Schür			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
<ol style="list-style-type: none"> <li><input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.</li> <li><input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.</li> <li><input type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).</li> <li><input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.</li> <li><input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> <li><input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).</li> <li><input checked="" type="checkbox"/> has been transmitted by the International Bureau.</li> <li><input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US)</li> </ol> </li> <li><input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).</li> <li><input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ol style="list-style-type: none"> <li><input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).</li> <li><input type="checkbox"/> have been transmitted by the International Bureau.</li> <li><input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li> <li><input type="checkbox"/> have not been made and will not be made.</li> </ol> </li> <li><input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</li> <li><input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</li> <li><input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</li> </ol>			
Items 11. to 16. below concern other document(s) or information included:			
11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.			
12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.			
13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.			
14. <input type="checkbox"/> A substitute specification.			
15. <input type="checkbox"/> A change of power of attorney and/or address letter.			
16. <input checked="" type="checkbox"/> Other items or information: Applicant Jörg Peter Schür is entitled to claim Small Entity status.			

202150-00000001

U.S. APPLICATION NO./FIDOWEL. NO. 37 C.F.R. 1.50 <b>10/019239</b>		INTERNATIONAL APPLICATION NO. PCT/EP00/06462		ATTORNEY'S DOCKET NUMBER von Kreisler.018	
--	--	---	--	--	--

<p>17. <input checked="" type="checkbox"/> The following fees are submitted:</p> <p style="margin-left: 20px;">Basic National Fee (37 CFR 1.492(a)(1)-(5)):</p> <p style="margin-left: 20px;">Search Report has been prepared by the EPO or JPO.....</p> <p style="margin-left: 20px;">International preliminary examination fee paid to USPTO (37 CFR 1.482) .....</p> <p style="margin-left: 20px;">No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2))..</p> <p style="margin-left: 20px;">Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO.....</p> <p style="margin-left: 20px;">International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4).....</p> <p style="text-align: center;"><b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b></p> <p>Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).</p> <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:15%;">Claims</th> <th style="width:15%;">Number Filed</th> <th style="width:15%;">Number Extra</th> <th style="width:15%;">Rate</th> <th style="width:15%;"></th> <th style="width:15%;"></th> </tr> <tr> <td>Total Claims</td> <td>20 - 20 -</td> <td>10</td> <td>X18.00</td> <td>\$</td> <td>0</td> </tr> <tr> <td>Independent Claims</td> <td>3 - 3 -</td> <td>2</td> <td>X84.00</td> <td>\$</td> <td>0</td> </tr> <tr> <td colspan="4">Multiple dependent claims(s) (if applicable)</td> <td>+</td> <td>\$</td> </tr> </table> <p style="text-align: center;"><b>TOTAL OF ABOVE CALCULATIONS =</b></p> <p>Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must also be filed. (Note 37 CFR 1.9, 1.27, 1.28).</p> <p style="text-align: center;"><b>SUBTOTAL =</b></p> <p>Processing fee of \$130.00 for furnishing the English translation later the <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).</p> <p style="text-align: center;"><b>TOTAL NATIONAL FEE =</b></p> <p>Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +</p> <p style="text-align: center;"><b>TOTAL FEES ENCLOSED =</b></p> <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:60%;"></td> <td style="width:10%; text-align: right;">Amount to be:</td> <td style="width:10%;"></td> <td style="width:20%;"></td> </tr> <tr> <td></td> <td style="text-align: right;">refunded</td> <td>\$</td> <td></td> </tr> <tr> <td></td> <td style="text-align: right;">charged</td> <td>\$</td> <td></td> </tr> </table>	Claims	Number Filed	Number Extra	Rate			Total Claims	20 - 20 -	10	X18.00	\$	0	Independent Claims	3 - 3 -	2	X84.00	\$	0	Multiple dependent claims(s) (if applicable)				+	\$		Amount to be:				refunded	\$			charged	\$		<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:50%;">CALCULATIONS</th> <th style="width:50%;">PTO USE ONLY</th> </tr> <tr> <td style="height: 150px;"></td> <td></td> </tr> </table>	CALCULATIONS	PTO USE ONLY		
Claims	Number Filed	Number Extra	Rate																																						
Total Claims	20 - 20 -	10	X18.00	\$	0																																				
Independent Claims	3 - 3 -	2	X84.00	\$	0																																				
Multiple dependent claims(s) (if applicable)				+	\$																																				
	Amount to be:																																								
	refunded	\$																																							
	charged	\$																																							
CALCULATIONS	PTO USE ONLY																																								

a. ☒ A check in the amount of \$520.00 to cover the above fees is enclosed.


b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$\_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any  
overpayment to Deposit Account No. 04-1406. A duplicate copy of this sheet is enclosed.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

<p>SEND ALL CORRESPONDENCE TO:</p> <p>Customer Number 000110</p> <p>DANN DORFMAN HERRELL AND SKILLMAN</p> <p>Suite 720</p> <p>1601 Market Street</p> <p>Philadelphia, PA 19103 - 2307</p>	<p style="text-align: center;"></p> <p style="text-align: center;">SIGNATURE</p> <p style="text-align: center;">John S. Child, Jr.</p> <p style="text-align: center;">NAME</p> <p style="text-align: center;"><u>28,833</u></p> <p style="text-align: center;">REGISTRATION NUMBER</p>
---	--

PATENT  
von Kreisler.019

UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application for National Phase  
Filing in the United States of

Jörg Peter Schür :  
Based upon PCT/EP00/02992 :  
Serial No. [to be assigned] :  
Filing Date [concurrently herewith] :  
For: "METHOD AND DEVICE :  
FOR ENRICHING AIR WITH :  
AN AIR TREATMENT AGENT" :

PRELIMINARY AMENDMENT UNDER 37 C.F.R. § 1.111

In The Specification

Please insert the following paragraph at page 1, line 1:

This Application claims the benefit of the earlier filing date of International  
Patent Application No. PCT/EP00/02992, filed April 4, 2000, under 35 U.S.C.  
§ 120 and claims the benefit under 35 U.S.C. § 119 of German Patent  
Application No. 19931 185.4 filed July 7, 1999.

In The Claims:

Cancel claim 1 without prejudice to reintroduction of this claim in a divisional or  
continuation application.

Amend claims 2-7 and 9 as follows:

2. [The] A method [according to claim 1,] for disinfecting air with an air  
treatment agent, wherein said air treatment agent is introduced into the air and evaporated  
from a liquid phase, wherein said introduction of [which] air treatment agent into the air  
comprises the following steps [for introducing the air treatment agent (12) into the air]:

- feeding the air treatment agent [(12)] from a storage chamber [(10)] into a vortexing chamber [(16)] through which air is flowing so that air flows through said air treatment agent;
- adjusting the supplied amount of air and the supplied amount of air treatment agent [(12)] to achieve a proportion of treatment agent in the air of between 0.1 and 0.00001 ml, [preferably between 0.01 and 0.0001 ml,] per m<sup>3</sup> of air per hour; and
- introducing the mixture of air and vaporized air treatment agent [(12)] into [a room to be] the air being treated.

3. (Amended) The method according to claim 2, characterized in that the ratio of the amount of air supplied to the amount of air treatment agent [(12)] supplied is between 45%/55% and 30%/70%[, preferably between 42%/58% and 35%/65%].

4. (Amended) The method according to claim 2 [or 3], wherein the mixture of air and air treatment agent [(12)], before being introduced into the [space to be treated] air, is conducted through an intermediate chamber [(38)] which is separated from the vortexing chamber [(16)] by a retaining disk [(36)].

5. (Amended) The method according to [any of] claim[s] 2[-4], wherein excess air treatment agent [(12)] is recirculated into the storage chamber [(10)].

6. (Amended) The method according to [any of] claim[s] 1[-5], wherein the proportion of air treatment agent in the air is  $\leq$  100 ppt[, preferably  $\leq$  10 ppt].

7. (Amended) The method according to [any of] claim[s] 1[-6], wherein an antimicrobial composition is used as said air treatment agent [(12)].

9. (Amended) A device for enriching air with an air treatment agent [(12)], especially for the disinfection of air, comprising:

- a storage vessel [(10)] for receiving liquid air treatment agent [(12)];
- a [vortexing] chamber [(16)] to which liquid air treatment agent [(12)] is supplied; and
- a means [(24)] for generating a current of air in said [vortexing] chamber [(16)],  
characterized in that said chamber is designed as a vortexing chamber, so that vortexing of the liquid treatment agent [(12)] is effected by the current of air [(30, 34)]  
which flows through the air treatment agent, and a mixture of air and vaporized air treatment agent [(12)] exits from the vortexing chamber [(16)].

Cancel claim 10 without prejudice to reintroduction of this claim in a divisional or continuation application.

Amend claims 11-18 as follows:

11. (Amended) The device according to claim 9 [or 10] , characterized in that air inlets [(32)] are provided in the bottom region of the vortexing chamber [(16)] through which excess air treatment agent [(12)] can drain in a direction opposite to that of the air flow.

12. (Amended) The device according to claim 11, characterized in that said vortexing chamber [(16)] and said storage chamber [(10)] have a common separation wall in which said air inlets [(32)] are provided.

13. (Amended) The device according to [any of] claim[s] 11-12, characterized in that said air inlets [(32)] are slots[, especially radially arranged slots].

14. (Amended) The device according to [any of] claim[s] 11-12], characterized in that said bottom region in which the air inlets [(32)] are provided is funnel-shaped.

15. (Amended) The device according to [any of] claim[s] 10[-14], characterized in that an intermediate chamber [(38)] is provided downstream of the vortexing chamber [(16)], which intermediate chamber is separated from the vortexing chamber [(16)] by a retaining disk [(36)] which has transfer apertures.

16. (Amended) The device according to [any of] claim[s] [10-14] 11, characterized in that a [particle] filter [(54)] and/or a bacterial filter (56) and/or a moisture filter (58) are] is inserted upstream of the air inlets [(32)].

17. (Amended) The device according to [any of] claim[s] 10[-16], characterized in that a pressure generating means [(60)] is provided downstream of the vortexing chamber to increase the pressure of the exiting mixture of air and vaporized air treatment agent [(12)].

18. (Amended) The device according to claim 17, characterized in that a lance [(68)] is connected to said pressure generating means [(60)] in order to introduce the mixture of air and vaporized air treatment agent [(12)] into food packages.

Cancel claims 19-22.

Add the following new claims 23-26.

23. (New) The method according to claim 6, wherein the proportion of air treatment agent in the air is  $\leq 10$  ppt.

24. (New) The method according to claim 2, wherein the step of adjusting the supplied amount of air and air treatment agent achieves an amount of air treatment agent in the air between 0.01 and 0.0001 ml per m<sup>3</sup>.

25. (New) The device according to claim 16, wherein the filter is selected from the group consisting of particle, bacterial and moisture filters.

26. (New) A device for the disinfection of air with an air treatment agent comprising:


- (a) a storage vessel for receiving liquid air treatment agent;
- (b) a chamber to which the air treatment agent is supplied; and
- (c) a means for generating a current of air in said chamber characterized in that, in said chamber, vortexing of the liquid treatment agent is effected by the current of air which flows through the air treatment agent with a mixture of air and vaporized air treatment agent exits from the vortexing chamber in a proportion of treatment agent to air of between 0.1 and 0.000001 ml per m<sup>3</sup> of air per hour.

#### REMARKS

New claim 23 is to a preferred embodiment set forth in claim 6 before amendment. New claim 24 is to a preferred embodiment set forth in claim 2 before amendment. New claim 25 is to a preferred embodiment set forth in claim 16 before amendment. Claim 26 is based on claims 2 and 9. A clean copy of pending claims 2-9, 11-18 and 23-26 is attached as **Exhibit A**.

Respectfully submitted,

Dann Dorfman Herrell and Skillman  
A Professional Corporation

  
John S. Child, Jr.  
PTO Registration No. 28,833

December 20, 2001

G:\SHARED\Georgia\von Kreisler\von Kreis 019\Pleadings\Preliminary Amendment.wpd

EXHIBIT A

CLAIMS

2. A method for disinfecting air with an air treatment agent, wherein said air treatment agent is introduced into the air and evaporated from a liquid phase, wherein said introduction of air treatment agent into the air comprises the following steps:

- feeding the air treatment agent from a storage chamber into a vortexing chamber through which air is flowing so that air flows through said air treatment agent;
- adjusting the supplied amount of air and the supplied amount of air treatment agent to achieve a proportion of treatment agent in the air of between 0.1 and 0.00001 ml, per m<sup>3</sup> of air per hour; and
- introducing the mixture of air and vaporized air treatment agent into the air being treated.

3. The method according to claim 2, characterized in that the ratio of the amount of air supplied to the amount of air treatment agent supplied is between 45%/55% and 30%/70%.

4. The method according to claim 2, wherein the mixture of air and air treatment agent, before being introduced into the air is conducted through an intermediate chamber which is separated from the vortexing chamber by a retaining disk.

5. The method according to claim 2, wherein excess air treatment agent is recirculated into the storage chamber.

6. The method according to claim 1, wherein the proportion of air treatment agent in the air is  $\leq$  100 ppt.

2001 DEC 20

7. The method according to claim 1, wherein an antimicrobial composition is used as said air treatment agent.

8. The method according to claim 7, wherein said antimicrobial composition contains one or more GRAS flavoring agents or their derivatives.

9. A device for enriching air with an air treatment agent, especially for the disinfection of air, comprising:

a storage vessel for receiving liquid air treatment agent;  
a chamber to which liquid air treatment agent is supplied; and  
a means for generating a current of air in said chamber, characterized in that said chamber is designed as a vortexing chamber, so that vortexing of the liquid treatment agent is effected by the current of air which flows through the air treatment agent, and a mixture of air and vaporized air treatment agent exits from the vortexing chamber.

11. The device according to claim 9, characterized in that air inlets are provided in the bottom region of the vortexing chamber through which excess air treatment agent can drain in a direction opposite to that of the air flow.

12. The device according to claim 11, characterized in that said vortexing chamber and said storage chamber have a common separation wall in which said air inlets are provided.

13. The device according to claim 12, characterized in that said air inlets are slots.

14. The device according to claim 11, characterized in that said bottom region in

which the air inlets are provided is funnel-shaped.

15. The device according to claim 10, characterized in that an intermediate chamber is provided downstream of the vortexing chamber, which intermediate chamber is separated from the vortexing chamber by a retaining disk which has transfer apertures.

16. The device according to claim 11, characterized in that a filter is inserted upstream of the air inlets.

17. The device according to claim 10, characterized in that a pressure generating means is provided downstream of the vortexing chamber to increase the pressure of the exiting mixture of air and vaporized air treatment agent.

18. The device according to claim 17, characterized in that a lance is connected to said pressure generating means in order to introduce the mixture of air and vaporized air treatment agent into food packages.

23. The method according to claim 6, wherein the proportion of air treatment agent in the air is  $\leq 10$  ppt.

24. The method according to claim 2, wherein the step of adjusting the supplied amount of air and air treatment agent achieves an amount of air treatment agent in the air between 0.01 and 0.0001 ml per m<sup>3</sup>.

25. The device according to claim 16, wherein the filter is selected from the group consisting of particle, bacterial and moisture filters.

26. A device for the disinfection of air with an air treatment agent comprising:

- (a) a storage vessel for receiving liquid air treatment agent;
- (b) a chamber to which the air treatment agent is supplied; and
- (c) a means for generating a current of air in said chamber characterized

in that, in said chamber, vortexing of the liquid treatment agent is effected by the current of air which flows through the air treatment agent with a mixture of air and vaporized air treatment agent exits from the vortexing chamber in a proportion of treatment agent to air of between 0.1 and 0.000001 ml per m<sup>3</sup> of air per hour.

2/pk

PATENT

Attorney Docket No. von Kreisler.019

Method and Device for Enriching Air with an Air Treatment Agent

The present invention relates to a method and a device for enriching air with an air treatment agent, especially for the disinfection of air.

For example, during the cooling of bakery products after the baking process, it must be avoided that mold germs will settle on the surface prior to packaging. Thus, expensive air-filtering systems with different filter systems are employed. Since the mold germs will deposit in the filtering systems, the filters often act as molding sources themselves. Therefore, the filters must be replaced frequently and cleaned very thoroughly.

Also in the storing of cheese after maturation, undesirable molding occurs on the surface of the cheese from the mold germs present in the air. To avoid this, cheese is coated, for example, with a coating agent which contains an antibiotic. Due to diffusions, the antibiotic penetrates into the external portion of the cheese. The use of filtering systems in cheese production has the same disadvantage as in the production of bakery products.

Another field of application is air treatment in apartments (e.g., of allergic people), office buildings, traffic and conveying means and areas, hygienic areas of productions, storage, packaging, in health service and the like.

Further, for the treatment of air, evaporators are known in which an air treatment agent is evaporated by the addition of heat. When the air treatment agent is evaporated in this manner, the air is enriched with treatment agents to a relatively high extent so that the treatment agent will precipitate in the space to be treated. Even the pulsing of an evaporator which operates by the input of heat cannot avoid the precipitation of the air treatment agent; the precipitation will only be intermittent.

Also in spraying/compressed air systems, the amount of sprayed air-treatment agent is so large that part of the air treatment agent will precipitate.

For the treatment of cooling rooms for bakery products or storage rooms for cheese, such evaporators cannot be employed, since the air treatment agent would deposit on the food. Also when ambient air is treated, the evaporation of an air treatment agent by the input of heat has the disadvantage that the air treatment agent will precipitate, for example, on cool windows.

It has been the object of the invention to provide a method and a device for enriching air with an air treatment agent, which can also be employed in food areas.

This object is achieved by the features of claims 1 and 9.

In the method according to the invention, the air-treatment agent is introduced into the air and evaporated from a liquid phase. According to the invention, the proportion of treatment agent in the air per  $\text{m}^3$  of air is between 0.1 and 0.00001 ml, preferably between 0.01 and 0.0001 ml. When such low amounts of air treatment agent per  $\text{m}^3$  of air are used, precipitation of the air treatment agent can no longer be detected. Therefore, the method according to the invention may also be employed for the treatment of air in storage rooms for food. Also in waiting rooms or apartments of allergic people and the like, the use of this method is particularly advantageous because an annoying precipitate on cool windows or the like will not occur.

For a proportion of air treatment agent of as low as 15 ppt (parts per trillion), an average germ reduction of 70% could be detected in an experiment. The proportion of air treatment agent is preferably  $\leq 100$  ppt, more preferably  $\leq 10$  ppt. Already such low amounts of air treatment agent can achieve a germ reduction which corresponds to clean-room conditions.

Preferably, in the method for introducing the air treatment agent into the air, the air treatment agent is first supplied from a storage chamber to a vortexing chamber through which air is flowing. The amount of air supplied to the vortexing chamber and the amount of air treatment agent supplied to the vortexing chamber are adjusted to provide a proportion of air treatment agent of between 0.1 and 0.00001 ml, preferably between 0.01 and 0.0001 ml per  $\text{m}^3$  of air per hour. Subsequently, the mixture of air and vaporized air treatment agent is introduced into the space to be treated.

The evaporation of the air treatment agent occurs without the supply of heat. Exclusively due to the vortexing of the air treatment agent, uptake of the low amount of air treatment

agent by the air is achieved. The amount of air treatment agent dragged away by the current of air is so low that an aerosol is not formed. The vortexing of the air treatment agent in the vortexing chamber generates a large number of air bubbles. This increases the surface of the air treatment agent in such a way that low amounts of air treatment agent are taken up by the current of air.

The amount of air supplied to the vortexing chamber and the amount of air treatment agent supplied to the vortexing chamber can be established empirically. Care is to be taken that the speed of the current of air is not so high that droplets of air treatment agent are dragged away. On the other hand, too low an amount of air treatment agent contained in the vortexing chamber causes that insufficient vortexing occurs. It has been found that particularly good results can be achieved at a ratio of the amount of air supplied to the amount of air treatment agent supplied of between 45%/55% and 30%/70%. Preferably, this ratio is between 42%/58% and 35%/65%.

Preferably, before being introduced into the space to be treated, the mixture of air and air treatment agent is conducted through an intermediate chamber which is separated from the vortexing chamber by a retaining disk. The function of the intermediate chamber is to allow excess air treatment agent in the air to condensate out. This is supported by the retaining disk, which preferably has fine apertures or is designed as a fine-pore membrane. Thus, the intermediate chamber serves as a drop separator. This ensures that no aerosol will get into the space to be treated. In the mixture of air and vaporized air treatment agent flowing into the space to be treated, a precipitate cannot be detected with conventional methods.

Since the amount of air treatment agent introduced into the vortexing chamber is significantly higher than the proportion of treatment agent contained in the mixture of air and air treatment agent, excess air treatment agent is discharged from the vortexing chamber. Preferably, the air treatment agent is recirculated into the storage chamber. From here, it can be reintroduced into the vortexing chamber immediately.

For the treatment of air, an antimicrobial composition is especially suitable as an air treatment agent for the disinfection of air. Preferably, the antimicrobial composition contains (a) one or more GRAS (generally recognized as safe) flavor alcohols or their derivatives; and (b) one or more flavoring agents selected from

- (b1) polyphenol compounds; and  
(b2) GRAS flavor acids or their derivatives.

Preferably, the antimicrobial composition contains the GRAS flavor alcohol benzyl alcohol as a necessary component;

5 The mentioned GRAS flavor alcohols of component (a) are recognized by the FDA authority as commercially safe for use in foods (GRAS = generally recognized as safe in food). The mentioned GRAS flavor alcohols and also the other GRAS flavoring agents defined below are the compounds mentioned in the FEMA/FDA GRAS Flavour Substances Lists GRAS 3-18 Nos. 2001-3905 (as of 1999). This list contains natural and naturally occurring synthetic  
10 flavoring agents approved by the American public health authority, FDA, for use in foodstuffs: FDA Regulation 21 CFR 172.515 for naturally occurring synthetic flavoring agents (Synthetic Flavoring Substances and Adjuvants) and FDA Regulation 21 CFR 182.20 for natural flavoring agents (Natural Flavoring Substances and Adjuvants).

The antimicrobial composition defined above under (1) can contain  
15 from 0.1 to 99.9% by weight, preferably from 0.5 to 99% by weight, of component (a); from 0 to 25% by weight, preferably from 0.01 to 10% by weight, of component (b1); and/or from 0 to 70% by weight, preferably from 0.01 to 30% by weight, of component (b2).

According to the invention, component (a) may contain one or more GRAS flavor alcohols. It is preferred according to the invention to use two or three GRAS flavor alcohols. In detail,  
20 the following GRAS flavor alcohols may be employed, for example:

benzyl alcohol, acetoin (acetylmethylcarbinol), ethyl alcohol (ethanol), propyl alcohol (1-propanol), isopropyl alcohol (2-propanol), isopropanol, propylene glycol, glycerol, n-butyl alcohol (n-propyl carbinol), iso-butyl alcohol (2-methyl-1-propanol), hexyl alcohol (hexanol), L-menthol, octyl alcohol (n-octanol), cinnamyl alcohol (3-phenyl-2-propene-1-ol),  $\alpha$ -  
25 methylbenzyl alcohol (1-phenylethanol), heptyl alcohol (heptanol), -amyl alcohol (1-pentanol), iso-amyl alcohol (3-methyl-1-butanol), anisalcohol (4-methoxybenzyl alcohol, p-anisalcohol), citronellol, n-decyl alcohol (n-decanol), geraniol,  $\beta$ - $\gamma$ -hexenol (3-hexenol), lauryl alcohol (dodecanol), linalool, nerolidol, nonadienol (2,6-nonadiene-1-ol), nonyl alcohol (nonanol-1), rhodinol, terpineol, borneol, clineol (eucalyptol), anisole, cuminyl alcohol  
30 (cuminol), 10-undecene-1-ol, 1-hexadecanol. As said derivatives, both natural and synthetic (naturally occurring or not) derivatives can be employed. Suitable derivatives include, for

example, the esters, ethers and carbonates of the above mentioned GRAS flavor alcohols. Particularly preferred GRAS flavor alcohols are benzyl alcohol, 1-propanol, glycerol, propylene glycol, n-butyl alcohol, citronellol, hexanol, linalool, acetoin and their derivatives.

As component (b1), the following polyphenols may be employed:

catechol, resorcinol, hydroquinone, phloroglucinol, pyrogallol, cyclohexane, usnic acid, acylpolyphenols, lignins, anthocyanins, flavones, catechols, gallic acid derivatives (e.g., tannins, gallotannin, tannic acids, gallotannic acids), including derivatives of the above-mentioned compounds, such as (2,5-dihydroxyphenyl)carboxylic and (2,5-dihydroxyphenyl)alkylenecarboxylic substitutions, salts, esters, amides; caffeic acid and its esters and amides, flavonoids (e.g., flavone, flavonol, isoflavone, gossypetin, myricetin, robinetin, apigenin, morin, taxifolin, eriodictyol, naringin, rutin, hesperidin, troxerutin, chrysin, tangeritin, luteolin, catechols, quercetin, fisetin, kaempferol, galangin, rotenoids, auronoids, flavonols, flavonediols), extracts, e.g., from Camellia, Primula. Further, their possible derivatives, e.g., salts, acids, esters, oxides and ethers, may also be used. A particularly preferred polyphenol is tannin (a GRAS compound).

As component (b2), the following GRAS acids may be used, for example:

acetic acid, aconitic acid, adipic acid, formic acid, malic acid (1-hydroxysuccinic acid), capronic acid, hydrocinnamic acid (3-phenyl-1-propionic acid), pelargonic acid (nonanoic acid), lactic acid (2-hydroxypropionic acid), phenoxyacetic acid (glycolic acid phenyl ether), phenylacetic acid ( $\alpha$ -toluenic acid), valeric acid (pentanoic acid), iso-valeric acid (3-methylbutyric acid), cinnamic acid (3-phenylpropenoic acid), citric acid, mandelic acid (hydroxyphenylacetic acid), tartaric acid (2,3-dihydroxybutanedioic acid; 2,3-dihydroxysuccinic acid), fumaric acid, tannic acid and their derivatives.

Suitable derivatives of the mentioned acids according to the present invention are esters (e.g., C<sub>1-6</sub>-alkyl esters and benzyl esters), amides (including N-substituted amides) and salts (alkali, alkaline earth and ammonium salts). According to the present invention, the term "derivatives" also encompasses modifications of the side-chain hydroxy functions (e.g., acyl and alkyl derivatives) and modifications of the double bonds (e.g., the perhydrogenated and hydroxylated derivatives of the mentioned acids).

The mixing ratio of component (a) to component (b) is preferably between 10,000:1 and 1:10,000, more preferably between 1000:1 and 1:1000, and even more preferably between 100:1 and 1:100.

Preferably, the antimicrobial composition contains:

- 5 (a1) benzyl alcohol as a necessary component; and optionally
- (a2) one or more further GRAS flavor alcohols or their derivatives; and
- (b1) one or more polyphenol compounds; and/or
- (b2) one or more GRAS acids or their derivatives.

Suitable amounts of components (a1), (a2), (b1) and (b2) are:

from 0.1 to 99% by weight, preferably from 0.1 to 75% by weight, of benzyl alcohol;  
from 0 to 99.8% by weight, preferably from 0.01 to 99% by weight, of component (a2);  
from 0 to 25% by weight, preferably from 0.01 to 10% by weight, of component (b1); and/or  
from 0 to 70% by weight, preferably from 0.01 to 30% by weight, of component (b2).

The antimicrobial composition may further contain the following components (c) to (h), which are also flavoring agents recognized in the FEMA/FDA GRAS Flavour Substances List as GRAS (generally recognized as safe in food) 3-18 Nos. 2001-3905 (as of 1999).

As component (c), the following phenol compounds may be employed:

thymol, methyleugenol, acetyleneugenol, safrol, eugenol, isoeugenol, anethole, phenol, methylchavicol (estragol; 3-(4-methoxyphenyl)-1-propene), carvacrol,  $\alpha$ -bisabolol, farnesol,  
20 anisole (methoxybenzene), propenylguaethol (5-propenyl-2-ethoxyphenol) and their derivatives.

As GRAS esters (component (d)), allicin and the following acetates may be used: iso-amyl acetate (3-methyl-1-butyl acetate), benzyl acetate, benzylphenyl acetate, n-butyl acetate, cinnamyl acetate (3-phenylpropenyl acetate), citronellyl acetate, ethyl acetate (acetic ester),  
25 eugenol acetate (acetyleneugenol), geranyl acetate, hexyl acetate (hexanyl ethanoate), hydrocinnamyl acetate (3-phenylpropyl acetate), linalyl acetate, octyl acetate, phenylethyl acetate, terpinyl acetate, triacetin (glyceryl triacetate), potassium acetate, sodium acetate, calcium acetate. Further suitable esters are the ester derivatives of the above defined acids (component (b2)).

As terpenes (component (e)), there may be used, for example, camphor, limonene and  $\beta$ -caryophyllene.

The acetals (component (f)) which can be used include, e.g., acetal, acetaldehyde dibutyl acetal, acetaldehyde dipropyl acetal, acetaldehyde phenethyl propyl acetal, cinnamic aldehyde ethylene glycol acetal, decanal dimethyl acetal, heptanal dimethyl acetal, heptanal glyceryl acetal and benzaldehyde propylene glycol acetal.

As aldehydes (component (g)), there may be used, e.g., acetaldehyde, anisaldehyde, benzaldehyde, iso-butyl aldehyde (methyl-1-propanal), citral, citronellal, n-caprylic aldehyde (n-decanal), ethylvanillin, furfural, heliotropin (piperonal), heptyl aldehyde (heptanal), hexyl aldehyde (hexanal), 2-hexenal ( $\beta$ -propylacrolein), hydrocinnamic aldehyde (3-phenyl-1-propanal), lauryl aldehyde (dodecanal), nonyl aldehyde (n-nonanal), octyl aldehyde (n-octanal), phenylacetaldehyde (1-oxo-2-phenylethane), propionaldehyde (propanal), vanillin, cinnamic aldehyde (3-phenylpropenal), perillaldehyde and cuminaldehyde.

The following essential oils and/or alcoholic or glycolic extracts or extracts obtained by CO<sub>2</sub> high-pressure processes from the mentioned plants (component (h)) can also be employed according to the invention:

(h1) oils or extracts having a high content of alcohols: melissa, coriander, cardamon, eucalyptus;

(h2) oils or extracts having a high content of aldehydes: Eucalyptus citriodora, cinnamon, lemon, lemon grass, melissa, citronella, lime, orange;

(h3) oils or extracts having a high content of phenols: origanum, thyme, rosemary, orange, clove, fennel, camphor, mandarin, anise, cascarilla, estragon and pimento;

(h4) oils or extracts having a high content of acetates: lavender;

(h5) oils or extracts having a high content of esters: mustard, onion, garlic;

(h6) oils or extracts having a high content of terpenes: pepper, bitter orange, caraway, dill, lemon, peppermint, nutmeg.

The proportion of components (c) to (h) in the antimicrobial composition is preferably smaller than or equal to 25% by weight, more preferably within a range of from 0.001 to 9% by weight. Preferred among the further GRAS flavoring agents are the phenols (c) and essential oils (h).

Particularly preferred according to the present invention are antimicrobial compositions in which the antimicrobially active component exclusively consists of GRAS flavoring agents, *i.e.*, which does not contain any "derivatives" of the GRAS flavoring agents. As an example of such a composition, there may be mentioned a mixture of benzyl alcohol, one or two of the above mentioned GRAS flavor alcohols (a2) and tannin. Such a mixture preferably contains from 0.1 to 99.9% by weight, more preferably from 0.1 to 20% by weight, of benzyl alcohol, and from 0.01 to 10% by weight of tannin. Another example of a preferred composition is a mixture of 2 alcohols, a polyphenol (especially tannin) and an essential oil (especially a phenolic essential oil, component (h3)).

In addition to components (a) to (h), further compounds (i), such as alcohols (i1), emulsifiers (i2), stabilizers (i3), antioxidants (i4), preservatives (i5), solvents (i6), carriers (i7), water (i8), etc., may additionally be employed. The proportion of components (i) in the antimicrobial composition may be up to 95% by weight, is preferably smaller than 10% by weight, and is more preferably within a range of from 0.1 to 5% by weight.

According to the invention, the alcohols (i1) are monohydric or polyhydric alcohols having from 2 to 10 carbon atoms, preferably having from 2 to 7 carbon atoms, not including the GRAS alcohols (a). Preferably, the GRAS flavor alcohols (a) and further alcohols (i1) are employed in such amounts that their mixing ratio is between 1000:1 and 1:1000, especially between 100:1 and 1:100, and more preferably between 10:1 and 1:10.

It is preferred to use systems which exclusively consist of GRAS flavoring agents, especially when the treated air will contact food, beverages or packages in food-processing plants, since this also avoids the risk of contamination of the treated foodstuffs with non-GRAS compounds. Further, especially when the method according to the invention is applied in food-processing plants or inhabited spaces, it should be taken care that the antimicrobial composition is free from ethanol and isopropanol, or free from harmful doses of ethanol and isopropanol, since these substances can be both absorbed by foods and inhaled by the people in the treated rooms. In addition, when such compounds are used, there may be danger of explosion.

In experimental examples, it could be shown that a reduction factor  $R_t$  of 5 to 1 powers of ten can be achieved by the distributing or atomizing of the antimicrobial composition

according to the invention, *i.e.*, a reduction of the germs per m<sup>3</sup> of air from 10,000 to 0 is possible.

Thus, the present method is suitable for the disinfection of the air in private households, offices and public buildings as well as in food-processing plants, transport devices, cooling, air-conditioning and other aeration fields. In the latter, a significantly higher stability of the food is achieved by the disinfection of the ambient air (*e.g.*, in the packaging of the food).

A device according to the invention for enriching air with an air treatment agent, which is especially suitable for the disinfection of air, comprises a storage chamber, a vortexing chamber and a means for generating a current of air. The storage chamber contains a liquid air treatment agent. The liquid air treatment agent is supplied to the vortexing chamber, for example, using a pump. Depending on the configuration of the device, the means for generating a current of air can be a fan sucking the mixture out of the vortexing chamber, or a fan blowing air into the vortexing chamber. The fan is arranged in such a way that a current of air is generated in the vortexing chamber due to which the vortexing of the liquid treatment agent is effected. Due to the vortexing of the air treatment agent, the air takes up a small amount of air treatment agent, so that a mixture of air and vaporized air treatment agent exits from the vortexing chamber.

The device according to the invention is suitable for performing the method according to the invention, so that the mixture of air and vaporized air treatment agent exiting from the device has a proportion of air treatment agent per m<sup>3</sup> of air per hour of between 0.1 and 0.00001 ml, preferably between 0.01 and 0.0001 ml. Depending on the kind of treatment agent, the proportion of the treatment agent in the air can be adjusted by the ratio of the amount of air supplied to the amount of treatment agent supplied to the vortexing chamber. It has been found that such a low proportion of treatment agent can be achieved at a ratio of the amount of air to the amount of treatment agent of between 45%/55% and 30%/70%, preferably between 42%/58% and 35%/65%.

Preferably, the vortexing chamber has air inlets in the bottom region through which air flows into the vortexing chamber. Further, excess air treatment agent can drain from the vortexing chamber through the air inlets in a direction opposite to that of the air flow.

2025-09-26 15:00:00

In experiments with an air disinfectant, a proportion of treatment agent of 0.01 ml per m<sup>3</sup> of air was achieved at an air flow rate of about 1100 m<sup>3</sup> per hour. Thus, with the above mentioned ratios between the air and the treatment agent, a very low proportion of air treatment agent is taken up by the air, and a major portion of the air treatment agent is discharged from the vortexing chamber. This is a surprising effect, because a very low proportion of air treatment agent is taken up by the air due to the vortexing despite of the very large amount of air treatment agent present in the vortexing chamber. To introduce such low amounts of air treatment agent into the air is not possible with spraying techniques or with thermal evaporation. In particular, it is not possible when known devices are operated without pulsing. However, in the device according to the invention, the above result was achieved without any pulsing.

In order to ensure that actually no precipitating aerosol escapes from the device, an intermediate chamber is provided downstream of the vortexing chamber. Between the intermediate chamber and the vortexing chamber, a retaining disk is provided. Any droplets of air treatment agent dragged away by the current of air are retained by the retaining disk, on the one hand, and will condensate out in the intermediate chamber, on the other hand.

Preferably, filters are inserted upstream of the air inlets of the vortexing chamber in order to supply air to the device which is as much as possible free of germs, particles and bacteria. For this purpose, a particle filter and/or a bacterial filter and/or a moisture filter are provided.

Advantageously, the device is coupled to an air conditioning system, so that a distribution of the air treatment agent throughout the space is ensured by the air conditioning system.

In another embodiment, a pressure generating means is provided downstream of the device to increase the pressure of the exiting mixture of air and vaporized air treatment agent. Such a device can be used, for example, to ensure that the mixture is blown also into the corners of a room.

To a device with a pressure generating means connected thereto, a lance with air outlets can be connected. The lance can be inserted into food packages in order to introduce the air treatment agent into the package.

With the device described here, the above defined antimicrobial compositions, in particular, can be released into the air.

In the following, the invention will be further illustrated in preferred embodiments thereof with reference to the accompanying drawings:

Figure 1 shows a schematic lateral view of the device for enriching air; and

Figure 2 shows a device which corresponds to the device represented in Figure 1 with a pressure generating means provided downstream.

A storage chamber 10 contains air treatment agent 12. The air treatment agent 12 is pumped from the storage chamber 10 into a vortexing chamber 16 using a pump 14. Further, the storage chamber 10 is provided with a filler neck 18 for replenishing air treatment agent 12 and with a level indicator 20 having the shape of a transparent tube.

The air treatment agent 12 pumped from the storage chamber 10 into the vortexing chamber 16 is supplied to the vortexing chamber 16 through an inlet 22. Depending on the pump pressure and the size of the inlet 22, the air treatment agent 12 is injected into the vortexing chamber 16 at different pressures. This injection of the air treatment agent 12 can increase the vortexing effect in the vortexing chamber 16.

Using a fan 24 serving as a means for generating a current of air and driven by a motor 26, air is sucked through an air supply duct 28 into the upper region of the storage chamber 10. From there, the air enters the vortexing chamber 16 in the direction of arrow 30 through air inlets 32 provided in the bottom region of the vortexing chamber 16. From there, the air current enters an intermediate chamber 38 in the direction of arrows 34 through a retaining disk 36. From the intermediate chamber 38, the mixture of air and air treatment agent enters a fan chamber 44 through a tubular connection piece 40 in the direction of arrow 42, and from there, it enters the space to be treated in the direction of arrow 46.

The air inlets 32 provided in the bottom region of the vortexing chamber 16 are radially arranged slots through which the air enters the vortexing chamber 16. Since the amount of air treatment agent 12 supplied to the vortexing chamber 16 is higher than the proportion of air treatment agent in the mixture exiting the device, a major portion of the air treatment agent 12 must be recirculated from the vortexing chamber 16 into storage chamber 10. In the embodiment shown, the excess air treatment agent 12 flows through the slot-shaped air inlets 32 back into the storage chamber 12. For this purpose, the bottom region of the vortexing chamber 16 in which the air inlets 32 are provided has a funnel-shaped design. In

order to ensure a well-aimed backflow of the excess air treatment agent, a funnel 50 is provided in the upper region of the storage chamber 10. Further, the funnel 50 prevents air treatment agent 12 from getting into the air supply duct 28.

The slot width of the air inlets 32 can be adjusted because the bottom region consists of individual triangular segments 52 whose inclination angle can be adjusted. The steeper the segments 52 are arranged, the larger are the slot-shaped air inlets 32.

The mixture of air and air treatment agent exiting from the vortexing chamber 16 is conducted through the retaining disk 36 into the intermediate chamber 38. The retaining disk 36 has apertures of low diameter or consists of a membrane having a fine porosity. The retaining disk 36 retains any droplets of air treatment agent dragged away by the current of air, so that only vaporized air treatment agent gets into the intermediate chamber 38, if possible.

The intermediate chamber 38 is provided as an additional safeguard. It ensures that any air treatment agent present in the mixture of air and air treatment agent which is not in a vaporized form will condensate out in the intermediate chamber 38. The portion of the air treatment agent which condensates out on the walls of the intermediate chamber 38 flows through the retaining disk 36 back into the vortexing chamber 16. From the intermediate chamber 38, a mixture of air and vaporized air treatment agent exclusively enters the fan chamber 44 along the arrow 42. The mixture entering the fan chamber 44 does not contain any more aerosol, so that the small amount of air treatment agent present in the mixture can no longer be detected as a precipitate.

In the air supply duct 28, a particle filter 54, especially a pollen filter, a bacterial filter 56 and a moisture filter 58, is provided for filtering the air sucked in. The moisture filter 58 withdraws the moisture from the air sucked in because the air treatment agents used are often hygroscopic.

To the fan chamber 44, a pressure generating means 60 (Figure 2) can be connected. In the example shown, this is a two-step pressure generating means having a first pressure generating step 62 and a second pressure generating step 64. After the pressure generating means 60, the mixture of air and air treatment agent is introduced into a flexible tube 66 under increased pressure. To the flexible tube 66, a lance 68 with outlets 70 is

connected. The lance 68 can be inserted into food packages to fill them with the mixture of air and air treatment agent.

When an air disinfectant is discharged by the device according to the invention, it can be introduced into packages of rolls and the like instead of nitrogen. The air disinfectant causes death of the mold germs present on the rolls. This ensures that the rolls cannot start to mold even when there are small apertures, which frequently occur in the welding seams of the package. This is not the case when nitrogen or the like is used, because nitrogen only suppresses the formation of mold. This means that the rolls start to mold as soon as fresh air gets into the package. When an air disinfectant is used, mold germs must also intrude into the package in addition to fresh air. Generally, it is not possible for them to intrude through the very small apertures in the welding seams. The use of air disinfectants in packages significantly reduces the risk of molding of the food contained.

## CLAIMS

1. A method for enriching air with an air treatment agent (12), especially for the disinfection of air, wherein said air treatment agent (12) is introduced into the air and evaporated from a liquid phase, wherein the proportion of treatment agent in the air per m<sup>3</sup> of air is between 0.1 and 0.00001 ml, preferably between 0.01 and 0.0001 ml.

2. The method according to claim 1, which comprises the following steps for introducing the air treatment agent (12) into the air:

- feeding the air treatment agent (12) from a storage chamber (10) into a vortexing chamber (16) through which air is flowing;
- adjusting the supplied amount of air and the supplied amount of air treatment agent (12) to achieve a proportion of treatment agent of between 0.1 and 0.00001 ml, preferably between 0.01 and 0.0001 ml, per m<sup>3</sup> of air per hour; and
- introducing the mixture of air and vaporized air treatment agent (12) into a room to be treated.

3. The method according to claim 2, characterized in that the ratio of the amount of air supplied to the amount of air treatment agent (12) supplied is between 45%/55% and 30%/70%, preferably between 42%/58% and 35%/65%.

4. The method according to claim 2 or 3, wherein the mixture of air and air treatment agent (12), before being introduced into the space to be treated, is conducted through an intermediate chamber (38) which is separated from the vortexing chamber (16) by a retaining disk (36).

5. The method according to any of claims 2-4, wherein excess air treatment agent (12) is recirculated into the storage chamber (10).

6. The method according to any of claims 1-5, wherein the proportion of air treatment agent in the air is  $\leq$  100 ppt, preferably  $\leq$  10 ppt.

7. The method according to any of claims 1-6, wherein an antimicrobial composition is used as said air treatment agent (12).

8. The method according to claim 7, wherein said antimicrobial composition contains one or more GRAS flavoring agents or their derivatives.

5 9. A device for enriching air with an air treatment agent (12), especially for the disinfection of air, comprising:

a storage vessel (10) for receiving liquid air treatment agent (12);

a vortexing chamber (16) to which liquid air treatment agent (12) is supplied; and

a means (24) for generating a current of air in said vortexing chamber (16), so that vortexing of the liquid treatment agent (12) is effected by the current of air (30, 34), and a mixture of air and vaporized air treatment agent (12) exits from the vortexing chamber (16).

10. The device according to claim 9, characterized in that the ratio of the amount of air supplied to the vortexing chamber (16) to the amount of air treatment agent (12) supplied to the vortexing chamber (16) is between 45%/55% and 30%/70%, preferably between 42%/58% and 35%/65%.

11. The device according to claim 9 or 10, characterized in that air inlets (32) are provided in the bottom region of the vortexing chamber (16) through which excess air treatment agent (12) can drain in a direction opposite to that of the air flow.

20 12. The device according to claim 11, characterized in that said vortexing chamber (16) and said storage chamber (10) have a common separation wall in which said air inlets (32) are provided.

13. The device according to any of claims 11-12, characterized in that said air inlets (32) are slots, especially radially arranged slots.

25 14. The device according to any of claims 11-12, characterized in that bottom region in which the air inlets (32) are provided is funnel-shaped.

15. The device according to any of claims 10-14, characterized in that an intermediate chamber (38) is provided downstream of the vortexing chamber (16), which intermediate chamber is separated from the vortexing chamber (16) by a retaining disk (36) which has transfer apertures.

5 16. The device according to any of claims 10-14, characterized in that a particle filter (54) and/or a bacterial filter (56) and/or a moisture filter (58) are inserted upstream of the air inlets (32).

10 17. The device according to any of claims 10-16, characterized in that a pressure generating means (60) is provided downstream to increase the pressure of the exiting mixture of air and vaporized air treatment agent (12).

18. The device according to claim 17, characterized in that a lance (68) is connected to said pressure generating means (60) in order to introduce the mixture of air and vaporized air treatment agent (12) into food packages.

15 19. The device according to any of claims 10-18, characterized in that the mixture of air and vaporized air treatment agent (12) supplied to the space to be treated contains between 0.1 and 0.00001 ml, preferably between 0.01 and 0.0001 ml, of air treatment agent (12) per m<sup>3</sup> of air per hour.

20 20. The device according to any of claims 10-19, characterized in that the proportion of air treatment agent in the mixture of air and air treatment agent supplied to the space to be treated is  $\leq 100$  ppt, preferably  $\leq 10$  ppt.

21. The device according to any of claims 10-20, characterized in that an antimicrobial composition is used as said air treatment agent (12).

22. The device according to claim 21, characterized in that said antimicrobial composition contains one or more GRAS flavoring agents or their derivatives.

## Abstract

### Method and Device for Enriching Air with an Air Treatment Agent


In a method for enriching air with an air treatment agent (12), especially for the disinfection of air, an air treatment agent (12) is introduced into the air and evaporated from a liquid phase.

5 The proportion of treatment agent in the air per m<sup>3</sup> of air is between 0.1 and 0.002 ml, preferably between 0.01 and 0.005 ml. In a device according to the invention for enriching air with an air treatment agent (12), a liquid air treatment agent (12) is provided in a storage vessel (10). It is supplied to a vortexing chamber (16). In the vortexing chamber (16), a current of air (34) produced by a fan (24) exists; it causes the liquid air treatment agent to be vortexed so that a mixture of air and vaporized air treatment agent exits from the vortexing chamber (16).

(Fig. 1)

G:\SHARED\Georgialvon Kreisler\von Kreis.019\Pleadings\Application.wpd

FIG. 1

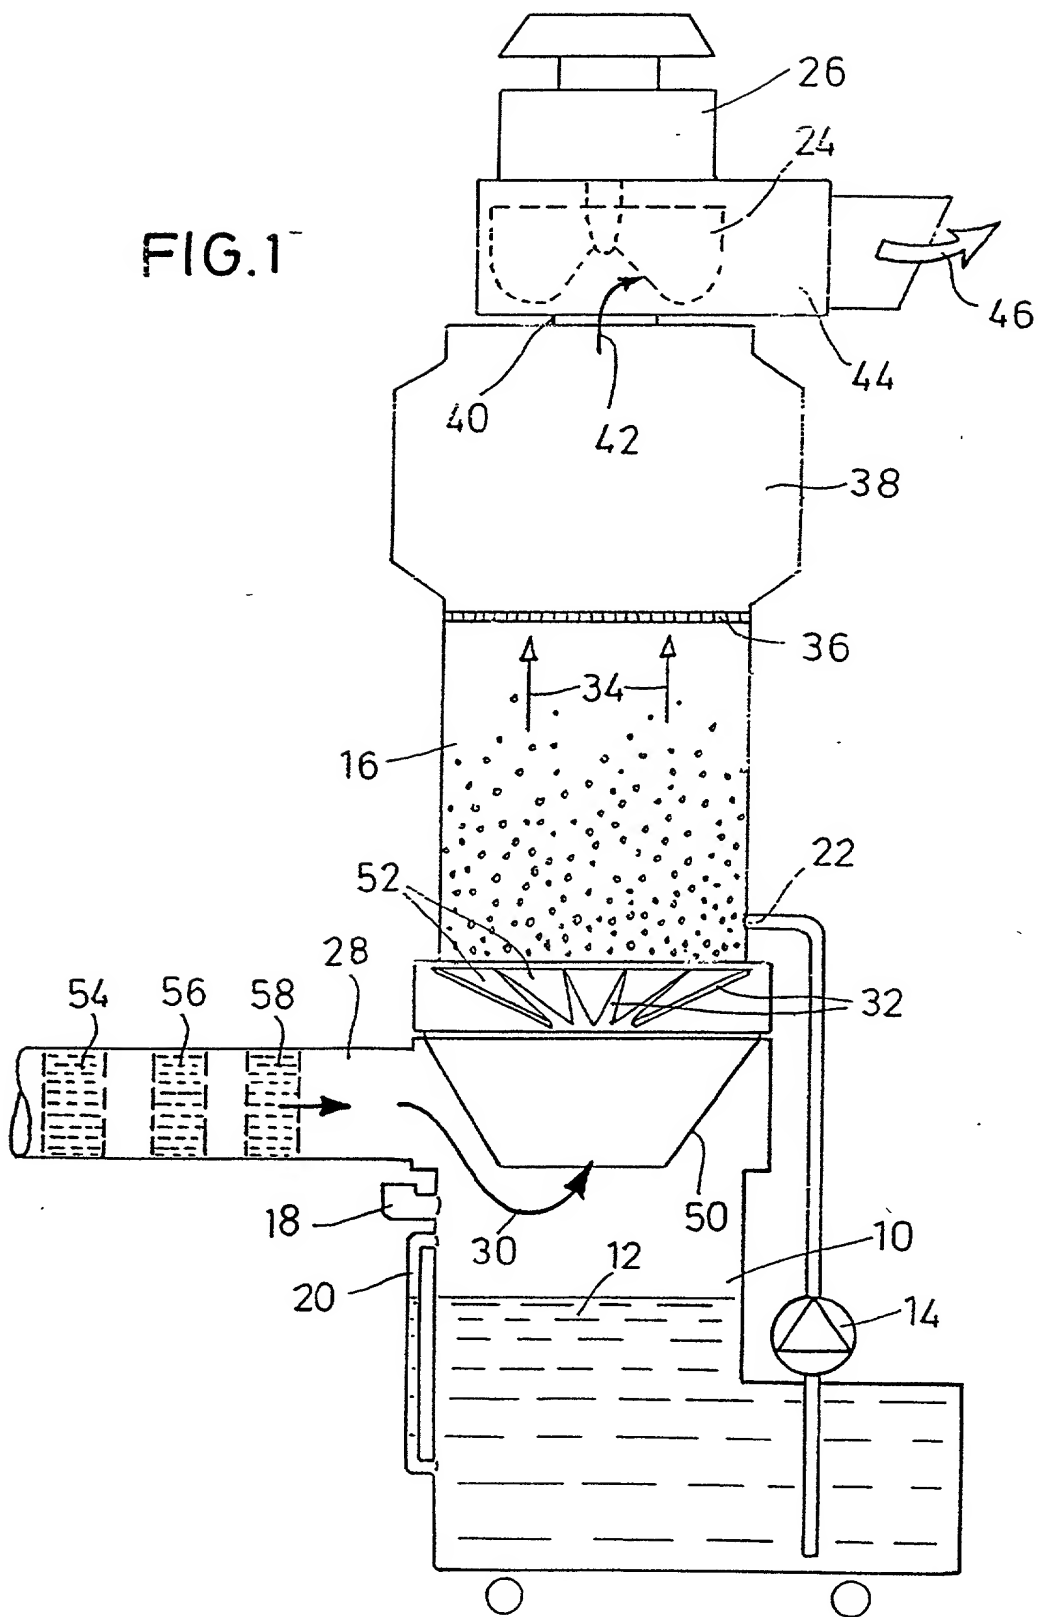

10019239-001301

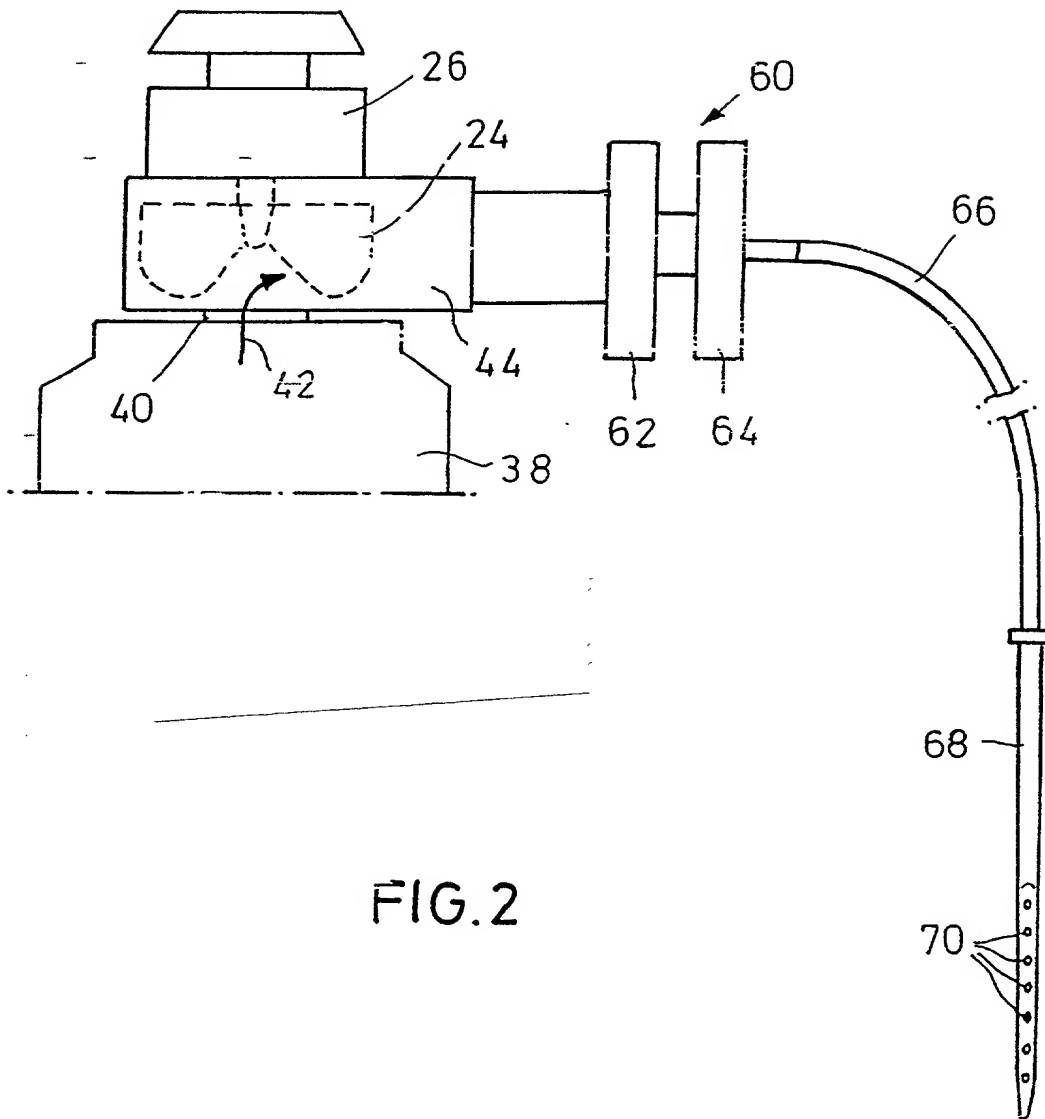


FIG. 2

## CLAIMS:

(amended)

1. A method for enriching air with an air treatment agent (12), especially for the disinfection of air, wherein said air treatment agent (12) is introduced into the air and evaporated from a liquid phase, wherein said introducing the air treatment agent (12) into the air comprises the following steps:

- feeding the air treatment agent (12) from a storage chamber (10) into a vortexing chamber (16) through which air is flowing, in which air flows through said air treatment agent;
- adjusting the supplied amount of air and the supplied amount of air treatment agent (12) to achieve a proportion of treatment agent in the air of between 0.1 and 0.00001 ml, preferably between 0.01 and 0.0001 ml, per m<sup>3</sup> of air per hour; and
- introducing the mixture of air and vaporized air treatment agent (12) into a room to be treated.

2. The method according to claim 1, characterized in that the ratio of the amount of air supplied to the amount of air treatment agent (12) supplied is between 45%/55% and 30%/70%, preferably between 42%/58% and 35%/65%.

3. The method according to claim 1 or 2, wherein the mixture of air and air treatment agent (12), before being introduced into the space to be treated, is conducted through an intermediate chamber (38) which is separated from the vortexing chamber (16) by a retaining disk (36).

4. The method according to any of claims 2-3, wherein excess air treatment agent (12) is recirculated into the storage chamber (10).

5. The method according to any of claims 1-5, wherein the proportion of air treatment agent in the air introduced into the space to be treated is  $\leq$  100 ppt, preferably  $\leq$  10 ppt.

6. The method according to any of claims 1-5, wherein an antimicrobial composition is used as said air treatment agent (12).

7. The method according to claim 6, wherein said antimicrobial composition contains one or more GRAS flavoring agents or their derivatives.

5 8. A device for enriching air with an air treatment agent (12), especially for the disinfection of air, comprising:

a storage vessel (10) for receiving liquid air treatment agent (12);

a chamber (16) to which liquid air treatment agent (12) is supplied; and

a means (24) for generating a current of air in said chamber (16), characterized in that said chamber (16) is designed as a vortexing chamber, so that vortexing of the liquid treatment agent (12) is effected by the current of air (30, 34) which flows through the air treatment agent, and a mixture of air and vaporized air treatment agent (12) exits from the vortexing chamber (16).

9. The device according to claim 8, characterized in that air inlets (32) are provided in the bottom region of the vortexing chamber (16) through which excess air treatment agent (12) can drain in a direction opposite to that of the air flow.

10. The device according to claim 9, characterized in that said vortexing chamber (16) and said storage chamber (10) have a common separation wall in which said air inlets (32) are provided.

20 11. The device according to any of claims 9-10, characterized in that said air inlets (32) are slots, especially radially arranged slots.

12. The device according to any of claims 9-11, characterized in that bottom region in which the air inlets (32) are provided is funnel-shaped.

25 13. The device according to any of claims 8-12, characterized in that an intermediate chamber (38) is provided downstream of the vortexing chamber (16), which

intermediate chamber is separated from the vortexing chamber (16) by a retaining disk (36) which has transfer apertures.

14. The device according to any of claims 8-12, characterized in that a particle filter (54) and/or a bacterial filter (56) and/or a moisture filter (58) are inserted upstream of the air inlets (32).

15. The device according to any of claims 8-14, characterized in that a pressure generating means (60) is provided downstream to increase the pressure of the exiting mixture of air and vaporized air treatment agent (12).

16. The device according to claim 15, characterized in that a lance (68) is connected to said pressure generating means (60) in order to introduce the mixture of air and vaporized air treatment agent (12) into food packages.

17. Use of the device according to any of claims 8-16 for performing the method according to any of claims 1-7.

(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES  
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG

(19) Weltorganisation für geistiges Eigentum  
Internationales Büro



(43) Internationales Veröffentlichungsdatum  
18. Januar 2001 (18.01.2001)

PCT

(10) Internationale Veröffentlichungsnummer  
**WO 01/03747 A1**

(51) Internationale Patentklassifikation<sup>7</sup>: A61L 9/12

(21) Internationales Aktenzeichen: PCT/EP00/02992

(22) Internationales Anmeldedatum:  
4. April 2000 (04.04.2000)

(25) Einreichungssprache: Deutsch

(26) Veröffentlichungssprache: Deutsch

(30) Angaben zur Priorität:  
199 31 185.4 7. Juli 1999 (07.07.1999) DE

(71) Anmelder und

(72) Erfinder: SCHÜR, Jörg, Peter [DE/DE]; Heideweg 51,  
D-41844 Wegberg-Dalheim (DE).

(74) Anwälte: VON KIRSCHBAUM, Alexander usw.; Post-  
fach 10 22 41, D-50462 Köln (DE).


(81) Bestimmungsstaaten (*national*): AE, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK,  
EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN,  
IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV,  
MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU,  
SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US,  
UZ, VN, YU, ZA, ZW.

(84) Bestimmungsstaaten (*regional*): ARIPO-Patent (GH,  
GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), euras-  
sches Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
europäisches Patent (AT, BE, CH, CY, DE, DK, ES, FI,  
FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI-Patent

[Fortsetzung auf der nächsten Seite]

(54) Title: METHOD AND DEVICE FOR ENRICHING AIR WITH AN AIR CONDITIONING AGENT

(54) Bezeichnung: VERFAHREN UND VORRICHTUNG ZUR ANREICHERUNG VON LUFT MIT LUFTBEHANDLUNGS-  
MITTEL

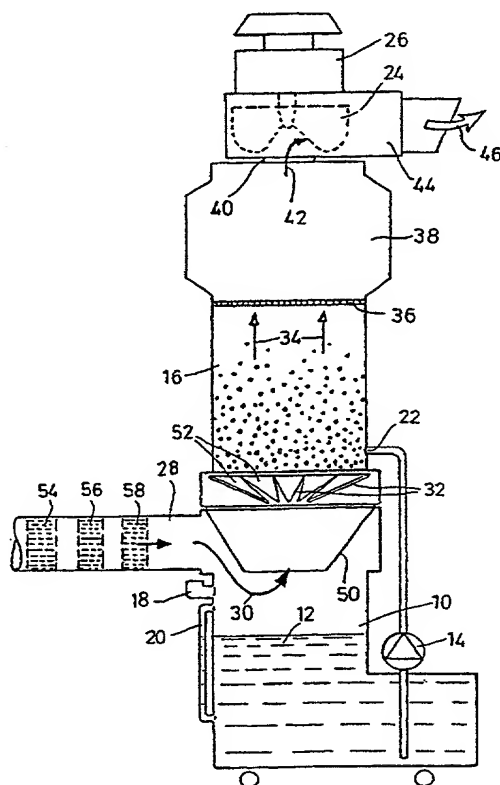

(57) Abstract: The invention relates to a method for enriching air with an air conditioning agent (12), especially for sterilizing the air. According to the inventive method, an air conditioning agent (12) in the liquid phase is introduced into the air and evaporated. The ratio of conditioning agent in the air ranges from 0.1 to 0.002 ml, preferably from 0.01 to 0.005 ml per m<sup>3</sup>. According to the inventive device for enriching air with an air conditioning agent (12) a liquid air conditioning agent (12) is provided in a reservoir (10). Said agent is guided into a turbulence chamber (16). A fan (24) produces an air current (34) in said turbulence chamber. Said air current (34) leads to a turbulence of the liquid air conditioning agent so that a mixture consisting of air and vaporous air conditioning agent is discharged from the turbulence chamber (16).

(57) Zusammenfassung: Bei einem Verfahren zur Anreicherung von Luft mit einem Luftbehandlungsmittel (12), insbesondere zur Luftentkeimung, wird ein Luftbehandlungsmittel (12) aus einer flüssigen Phase in die Luft eingebracht und verdampft. Hierbei beträgt der Behandlungsmittelanteil in der Luft pro m<sup>3</sup> Luft zwischen 0,1 und 0,002 ml, vorzugsweise zwischen 0,01 und 0,005 ml. Bei einer erfindungsgemässen Vorrichtung zum Anreichern der Luft mit einem Luftbehandlungsmittel (12) ist in einer Vorratskammer (10) ein flüssiges Luftbehandlungsmittel (12) vorgesehen. Dieses wird in eine Verwirbelungskammer (16) geleitet. In der Verwirbelungskammer (16) herrscht ein durch einen Ventilator (24) erzeugter Luftstrom (34), der eine Verwirbelung des flüssigen Luftbehandlungsmittels bewirkt, so dass aus der Verwirbelungskammer (16) ein Gemisch aus Luft und dampfförmigem Luftbehandlungsmittel austritt.

DECLARATION, POWER OF ATTORNEY AND POWER TO INSPECT

As the below named inventor, I hereby declare:

that my residence, post office address and citizenship are as stated below next to my name;

that I verily believe I am the original, first and sole inventor of the Invention entitled:

**"METHOD AND DEVICE FOR ENRICHING AIR WITH AN AIR TREATMENT AGENT"**

the specification of which [check one(s) applicable]:

☒ was first described and claimed in German Patent Application Serial No. **DE 19931185.4** filed on **July 7, 1999**;

☒ was filed as PCT International Application No. **PCT/EP/00/02992** on **April 4, 2000** (International Filing Date)

☐ and was amended by Amendments filed \_\_\_\_\_ (if applicable); [or];

☒ is attached to this Declaration, Power of Attorney and Power to Inspect;

that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above; and

that I acknowledge my duty to disclose information which is material to the examination of this application in accordance with Rule 56(a) [37CFR§1.56(a)].

**POWER OF ATTORNEY:** As inventor, I hereby appoint the practitioners associated with **Customer No. 000110** as my attorneys or agents with full power of substitution to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: **John S. Child Jr., Reg. No. 28,833**

**POWER TO INSPECT:** I hereby give **DANN, DORFMAN, HERRELL AND SKILLMAN, P.C.** of Philadelphia, PA or its duly accredited representatives power to inspect and obtain copies of the papers on file relating to this application.

**SEND CORRESPONDENCE TO: CUSTOMER NUMBER 000110**

**DIRECT INQUIRIES TO:** **John S. Child, Jr.**

**Telephone: (215) 563-4100**

**Facsimile: (215) 563-4044**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

**SOLE INVENTOR**

Full Name Jörg Peter Schür  
First Middle Last

Signature \_\_\_\_\_

Date April 11, 2002

Residence Wegberg-Dalheim, Germany  
City Country


Citizenship German

Post Office Address:

Heideweg 51

D-41844 Wegberg-Dalheim, Germany  
Zip Code City Country

United States Patent & Trademark Office  
Office of Initial Patent Examination -- Scanning Division

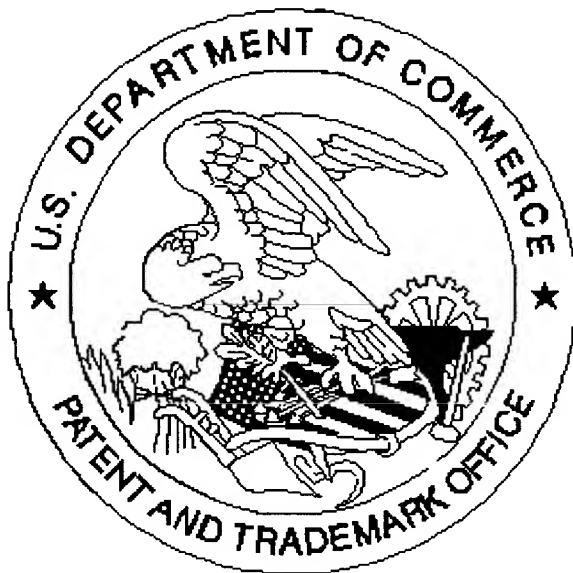

Application deficiencies found during scanning:

☒ Page(s) \_\_\_\_\_ of Drawings were not present  
for scanning. (Document title)

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☐ *Scanned copy is best available.*

SCANNED, #14